

Der Compressor V2 – Operating Values

Setting Bias

Connect Compressor and switch it „on“.

Turn trimpot R7 to center position. Sustain/Sensitivity-pot auf full left (minimum).


While playing single notes, slowly turn trimpot left and right. Leave in position where the notes can cleanly ring (no gating effect audible).

Meßwerte*1

$I_{ges} = 0,5 \dots 1,2 / 3,8 \dots 4,4$ mA (Power consumption without / with LED)

$V_{bat} = 8,95$ V

$GND = 0$ V

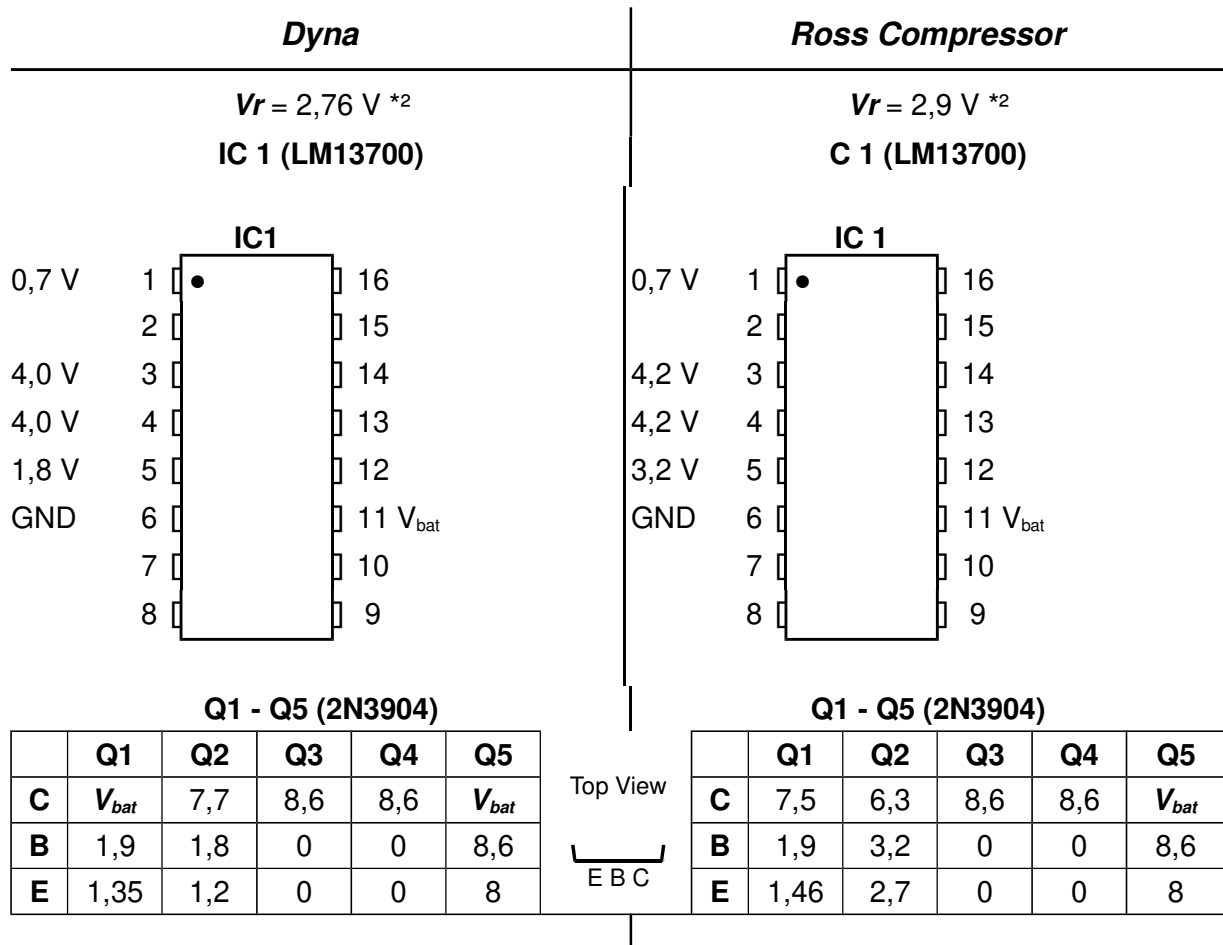

*1 All values measured to GND (Input-jack), no input-signal applied, Sustain/Sensitivity-pot fully turned right (maximum).

*2 measured on junction R21/R22